

## Aurras 6A



Active 6" Studio Monitor

## Aurras 8A

Active 8" Studio Monitor



Directivity control is used to make sure that the frequency balance is good even in difficult acoustic environments. So, the Aurras series will delight both your ears and your eyes.

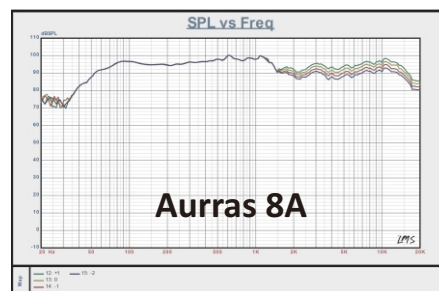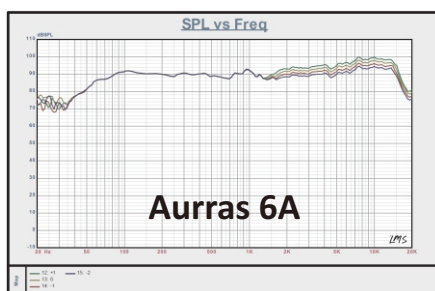

## Features

- 1" Silk soft dome tweeter
- Custom-designed glass aramid woofer
- Flexible inputs: RCA, Balanced 1/4" TRS
- Balanced XLR
- HF contour control
- Class AB topology
- Available in black and white



## Specification

	Aurras 6A	Aurras 8A
Type	Two-Way Active Near Field Studio Monitor	Two-Way Active Near Field Studio Monitor
HF Drivers	1" Silk soft dome	1" Silk soft dome
LF Drivers	6.5" Glass Aramid cone	8" Glass Aramid cone
Frequency Response (+/-3dB)	55 Hz - 20 kHz	45 Hz - 20 kHz
High Frequency Rated Power (Watt)	28W	36W
Low Frequency Rated Power (Watt)	45W	75W
Input Sensitivity	- 2 dB	- 2 dB
LF Contour Control	NO	NO
HF Contour Control	(-2 dB, -1 dB, FLAT, +1 dB)	(-2 dB, -1 dB, FLAT, +1 dB)
Audio Input	RCA, Balanced 1/4" TRS, Balanced XLR	RCA, Balanced 1/4" TRS, Balanced XLR
Crossover	1.9 kHz	1.8 kHz
Maximum SPL	90dB	100dB
Color	Black/White	Black/White
Dimension (W x H x D)	270x 230 x 320 mm	313 x 268 x 383 mm
Weight	9.2 Kg	12.6 Kg