

FIREFLY 202 USB

Portable USB 2.0 Audio Interface

2 x 2 24-bit/96kHz USB 2.0 digital interface
Headphone output with dedicated level control
Two 1/4" TRS inputs and two 1/4" TRS outputs
Low-latency ASIO software direct monitoring



FEATURES:

- ▶ 2 x 2 24-bit/96kHz USB 2.0 digital interface
- ▶ Headphone output with dedicated level control
- ▶ Two 1/4" TRS inputs and two 1/4" TRS outputs
- ▶ USB 2.0 connector
- ▶ Low-latency ASIO software direct monitoring
- ▶ USB connect LED indicator
- ▶ Powered via included DC power supply
- ▶ Mac and Windows compatible

The new Firefly 202 USB Portable USB2.0 Interface from Phonic is an easy-to-use, high-quality interface for performers and songwriters to record guitars, keyboards, vocals and more to the computer. Featured are 2 balanced 1/4" inputs and 2 balanced 1/4" outputs, which are sent to and from the computer in real time through the 24-bit/96kHz USB2.0 connection. Also included is a high volume headphone output with dedicated level control, ideal for the monitoring of recordings. Compatible with the most popular of Digital Audio Workstation software, this compact, bus-powered unit is small enough to go anywhere you want to take your music. Both simple and compact, the Firefly is the most convenient USB2.0 audio device you will find.


FIREFLY 202 USB

SPECIFICATION

Inputs (1 & 2)	2 x 1/4" TRS, Bal.
Outputs (1 & 2)	2 x 1/4" TRS, Bal.
Phones	1 x 1/4" TRS, Bal.
USB Interface	2 in & 2 out, 24-bit / 96 kHz
Control	1
Volume Controls	Rotary
Phones Level Control	Yes
Frequency Response (Input to output)	
20Hz ~ 20KHz	+0/-1 dB
S/N ratio	<-88 dBu
THD+N (Any output, 1KHz @ 0dBu, 20Hz to 20KHz, channel inputs)	<0.05%
Maximum Level	
Input	0 dBu
Output	+6 dBu
Phone Output	+2 dBu/100 ohm (1/100W)
Impedance	
Input	10 K ohms
Output	100 ohms
Phones	50 ohms
Power Requirement (external power supply, depends on region)	AC-DC adaptor, output 12V 750mA (6 Watt)



Front Panel

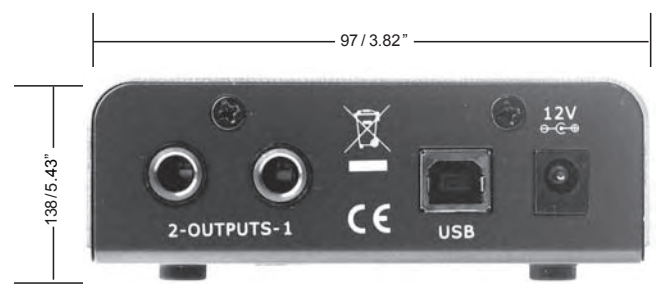

Back Panel