

## **FIREFLY 202** Portable FireWire Audio Interface

2 x 2 24-bit/96kHz FireWire stream I/O

Headphone output with dedicated level control for monitoring

Two 1/4" TRS inputs and two 1/4" TRS outputs

6-pin FireWire connector



### **FEATURES:**

- ▶ 2 x 2 24-bit/96kHz FireWire stream I/O
- ▶ Headphone output with dedicated level control for monitoring
- ▶ Two 1/4" TRS inputs and two 1/4" TRS outputs
- ▶ 6-pin FireWire connector
- ▶ Low-latency ASIO software direct monitoring
- ▶ FireWire LED indicator
- ▶ Powered via DC power supply or FireWire connection
- ▶ Mac OSX and Windows XP & Vista compatible


The new Firefly 202 Portable FireWire Interface from Phonic is an easy-to-use, high-quality interface for performers and songwriters to record guitars, keyboards, vocals and more to the computer. Featured are 2 balanced 1/4" inputs and 2 balanced 1/4" outputs, which are sent to and from the computer in real time through the 24-bit/96kHz FireWire connection. Also included is a high volume headphone output with dedicated level control, ideal for the monitoring of recordings. Compatible with the most popular of Digital Audio Workstation software, this compact, bus-powered unit is small enough to go anywhere you want to take your music. Both simple and compact, the Firefly is the most convenient FireWire audio device you will find.

## SPECIFICATION

Inputs (1 & 2)	2 x 1/4" TRS, Bal.
Outputs (1 & 2)	2 x 1/4" TRS, Bal.
Phones	1 x 1/4" TRS, Bal.
FireWire Interface	2 in & 2 out, 24-bit / 96 kHz
<b>Control</b>	1
Volume Controls	Rotary
Phones Level Control	Yes
<b>Frequency Response</b> (Input to output)	
20Hz ~ 20KHz	+0/-1 dB
S/N ratio	<-88 dBu
<b>THD+N</b> (Any output, 1KHz @ 0dBu, 20Hz to 20KHz, channel inputs)	<0.05%
<b>Maximum Level</b>	
Input	0 dBu
Output	+6 dBu
Phone Output	+2 dBu/100 ohm (1/100W)
<b>Impedance</b>	
Input	10 K ohms
Output	100 ohms
Phones	50 ohms
<b>Power Requirement</b> (external power supply, depends on region)	AC-DC adaptor, output 12V 750mA (6 Watt)



Front Panel

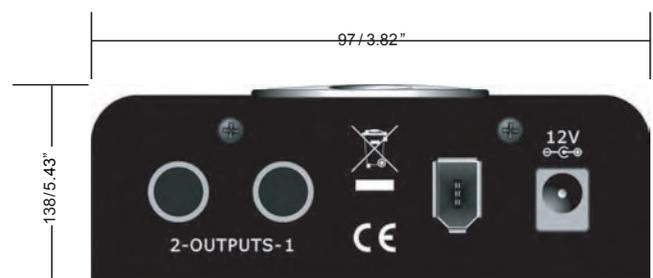

Back Panel

V1.0 05/22/09  
Information in this document is  
subject to change without notice.

# PHONIC