

PPC 8000

8-Outlet Power Conditioner with Light Modules

PPC 8000 E

10-Outlet Power Conditioner with Light Modules (European Standards)



Features

- ▶ 8 to 10 switched outlets on the rear of the unit
- ▶ Single, unswitched outlet on the front
- ▶ Two swiveling light fixtures with dimmer switch for rack illumination
- ▶ RFI / EMI filtering
- ▶ Circuit breaker with 10 amp rating
- ▶ Heavy-duty 14-gauge AC power cord
- ▶ Triple-mode varistor spike and surge protection

Description


Phonic PPC Power Conditioners help provide clean, constant power to all devices that require AC power while protecting them against power surges. Each PPC features between 8 and 10 accessory outlets, a 10 amp circuit breaker, and a single, unswitched outlet on the front. Two slide-out swiveling rack lights with dimmer control are offered on the front of the unit to light your rack. The 1 rack unit construct features a heavy duty 7 foot AC power cable for stable operation.

Dimensions

PPC SERIES

Professional 8 / 10 Outlet Power Conditioner

PPC 8000 | PPC 8000 E

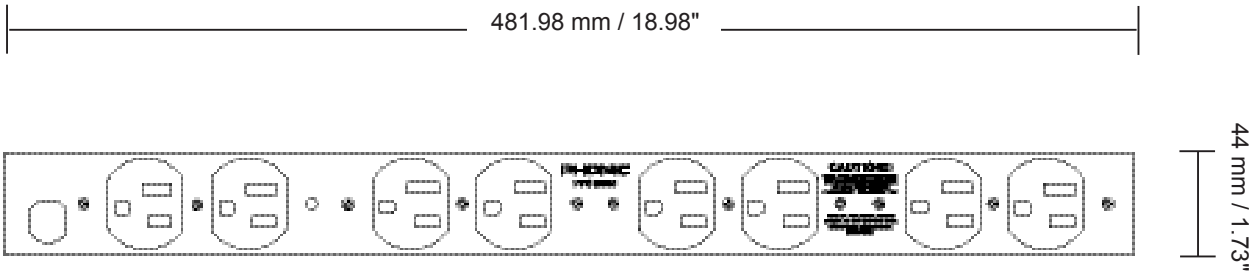

Specifications

	PPC 8000	PPC 8000 E
Current Rating	15 amps	10 amps
Accessory Outlets	8	10
Input Voltage	90 to 140 VAC	190 to 270 VAC
Voltage Meter Accuracy	N/A	N/A
Noise Attenuation	Transverse and common modes: 20dN at 200 KHz, rising to >40 dB, 1 to 100 MHz	Transverse and common modes: 20dN at 200 KHz, rising to >40 dB, 1 to 100 MHz
Lamp	2 slide-out, swiveling light fixtures	2 slide-out, swiveling light fixtures
Response Time	1 nanosecond	1 nanosecond
Maximum Surge Current	6,500 amps	6,500 amps
Dimensions (W x H x D)	481.98 x 44 x 152 mm (18.98" x 1.73" x 5.98")	481.98 x 44 x 152 mm (18.98" x 1.73" x 5.98")