

### SEM710

10" 2-way Stage/Floor Speaker

### SEM712

12" 2-way Stage/Floor Speaker

### SEM715

15" 2-way Stage/Floor Speaker

### SE705


15" 2-way Stage Speaker

### SE725

Dual 15" Stage Speaker

### SE725 Plus

Dual 15" Stage Speaker

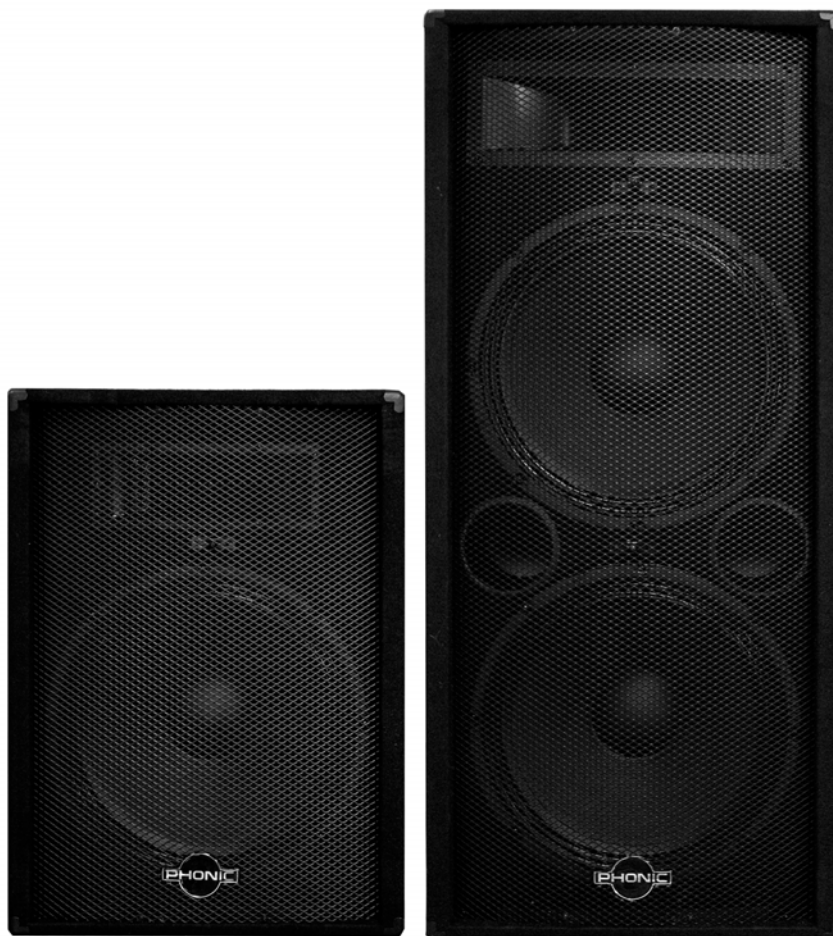

## Features

- ▶ Power handling (program): 160W / 300W / 400W / 300W / 600W / 800W (SEM710/SEM712/SEM715/SE705/SE725/SE725 Plus)
- ▶ Frequency responses: 50 Hz - 20 kHz or 60 Hz - 20 kHz
- ▶ High sound pressure level, between 95 and 122 dB SPL @ 1W / 1M
- ▶ 10" / 12" / 15" heavy-duty woofer and piezo tweeter
- ▶ SE725/SE725 Plus features two 15" woofers and piezo tweeter
- ▶ Built-in handle
- ▶ 1/4" phone jack inputs
- ▶ 8 Ohm nominal load (excluding active models & SE725/SE725 Plus)
- ▶ Double duty: use as a floor monitor or mounted as a raised sound reinforcement speaker (excluding SE705, SE725 and SE725 Plus)
- ▶ 35 mm stand adapter built-in (excluding SE725/SE725 Plus)

## Description


The style and innovation of the SEM and SE speakers is obvious at first glance. Available in passive and active models - and with a variety of woofer sizes and power handling abilities - the SEM and SE speakers give users what they really need. The SEM speakers themselves double as floor monitors when required, and include built-in handles for easy mobility. All models feature at least one woofer between 10" to 15" in size (the SE725/SE725 Plus generously provides two 15" woofers, making them in class of their own) and a piezo tweeter.

# SE SERIES

## Professional Passive Speaker

### Connection

SE705 | SE725 | SE725PLUS | SEM710 | SEM712 | SEM715

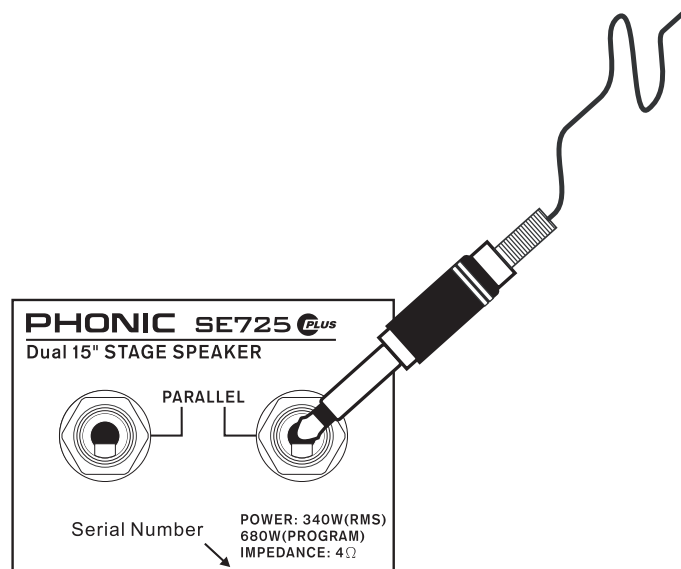

### Specifications

	SEM 710	SEM 712	SEM 715	SE 705	SE 725	SE 725 Plus
Type	10" 2-way Stage/ Floor Monitor Speaker	12" 2-way Stage/ Floor Monitor Speaker	15" 2-way Stage/ Floor Monitor Speaker	15" 2-way Stage Speaker	15" 2-way Stage Speaker	15" 2-way Stage / Floor Monitor
Power Handling (Watts) RMS / Program	80 / 160	150 / 300	200 / 400	150 / 300	300 / 600	400 / 800
Built-in Amplifier (Watts) RMS	-	-	-	-	-	-
Woofer Size	10"	12"	15"	15"	15" x 2	15" x 2
Frequency Response	65 Hz ~ 20 kHz	60 Hz ~ 20 kHz	50 Hz ~ 20 kHz	50 Hz ~ 20 kHz	40 Hz ~ 20 kHz	40 Hz ~ 20 kHz
Sensitivity @ 1 W / 1 M (+/-dB)	96 dB	95 dB	98 dB	95 dB	100 dB	100 dB
Built-in Crossover	Yes	Yes	Yes	Yes	Yes	Yes
Dispersion Angle (Degrees)	90 x 40	90 x 40	90 x 40	90 x 40	90 x 40	90 x 40
Box	Dual Angled Black Carpet			Black Carpet	Black Carpet	Black Carpet
Handles	-	2	2	2	2	2
Stand Socket	35 mm	35 mm	35 mm	35 mm	-	-
Nominal Impedance	8 ohm	8 ohm	8 ohm	8 ohms	4 ohms	4 ohms
Connector	2 x 1/4" phone jacks 2 x 1/4" phone jacks 2 x 1/4" phone jacks 2 x 1/4" phone jacks 2 x 1/4" phone jacks 2 x 1/4" phone jacks					
Dimensions (HxWxD)	491 x 351 x 314 mm (19.3" x 13.8" x 2.4")	540 x 376 x 356 mm (21.3" x 14.8" x 14")	679 x 476 x 388 mm (26.7" x 18.7" x 5.3")	740 x 485 x 334 mm (29.1" x 19.1" x 3.1")	1085 x 476 x 388 mm (42.7" x 18.7" x 5.3")	1085 x 476 x 388 mm (42.7" x 18.7" x 15.3")
Net Weight	11 kg (24 lbs)	13 kg (29 lbs)	19 kg (42 lbs)	22.3 kg (49 lbs)	36.5 kg (80 lbs)	36.5 kg (80 lbs)

Information in this document is subject to change without notice.

Page 2