




DB2

[Active Direct Box]

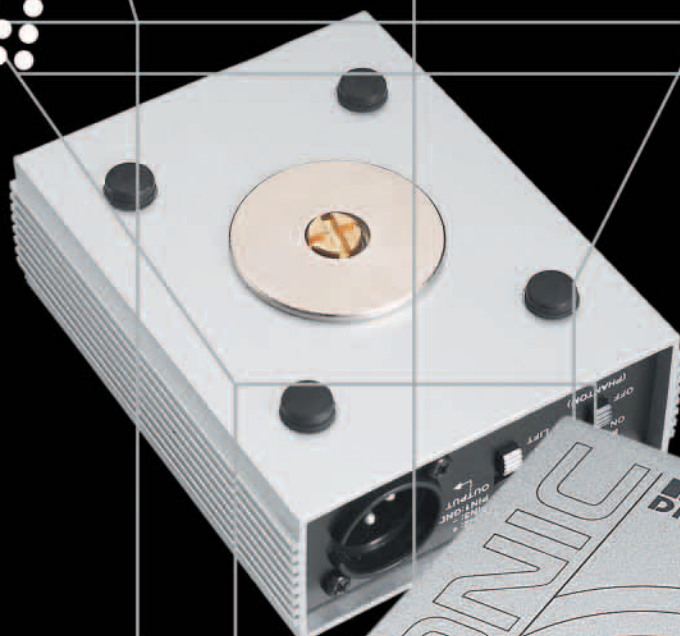

PHONIC

+ DB2 [ACTIVE DIRECT BOX]

The Phonic DB2 Direct box allows you to connect your electronic instrument directly to your mixer without hassle. The DB2 transforms your instrument signal without distorting the original output of your instrument. Leaving your instrument signals genuine, the DB2 is designed to maximize fidelity while minimizing noise. A convenient switch allows it to change instantly from grounding to lift, eliminating humming and buzzing completely. With its -20/-40 PAD switch that offers speaker/line attenuation and balanced XLR male connector for mic-level output, in addition to a magnetic base that attaches to anything metal, the DB2 makes connecting your instrument to your mixer a total breeze.

+ FEATURES

- > Professional multifunctional Direct Box
- > Ground/Lift switch
- > Input with link out
- > Pad attenuation
- > Battery or phantom power
- > Rugged metal housing
- > Magnetic base for attaching to anything metal
- > Internal battery automatically shut off when there is no input

+ SPECIFICATIONS

Frequency Response	20Hz-20KHz
Impedance	Output: 600 Ohms Input: >250K Ohms
Noise Level	-110 dB
THD+N @ 1KHz/0dB	<0.005%
Inputs	Unbalanced 1/4" Phone Jack
Output	Balanced XLR-M
Control	ON/OFF, Ground/Lift, Pad Attenuation Switch (0, -20 dB and -40dB)
Power Supply	9V Battery or Phantom Power(+18-48VDC)
Dimensions(WxHxD)	81.6x33.6x103.6mm(3.2"x1.32"x4")
Net Weight	339 g(0.75lbs)